

ASSEMBLY
AND
SERVICE MANUAL
FOR THE
E.R.A. 289FIA/USRRC



Revision 3b

© Era Replica Automobiles 12/2004

The Manual

The text and layout of this manual was done with Word for Windows. Some of the illustrations were hand drawn and scanned, some were done in DesignCad 2D and 3D. Spelling errors are the fault of the spel chekker...

NOTE ON MANUAL UPDATES

This manual was current at the time of your car's delivery. Any critical corrections will be mailed to you. If we can think of any thing that can be helpful but are non-critical, I will post them on the internet at:

<http://www.erareplicas.com/fiaman/>

The latest entire manual in PDF format is posted at

<http://www.erareplicas.com/owners/>.

*Thanks,
Bob Putnam -ERA-
e-mail:teracars@sbcglobal.net*

*Parts inquiries to:
eraparts@sbcglobal.net*

Contents

This manual is arranged by **assembly sequence**, not topic. For information on a specific topic - assembly or service, see the index.

<i>NOTE ON MANUAL UPDATES</i> _____	2
read me first _____	6
SECTION A: PARTS NEEDED _____	7
Picking up your kit _____	8
special notes _____	9
ENGINE _____	11
Alternator _____	11
Clutch Notes _____	11
Ignition Notes _____	11
TRANSMISSION _____	12
Bell-housing _____	13
Speedometer drive gears _____	15
Shift linkage _____	15
Rear Drive/Suspension Assembly _____	16
Steering Gear _____	16
Front Rotors and Calipers _____	17
Drive Shaft _____	17
Oil Cooler and oil Filter _____	17
Steering Column (Upper) _____	17
Steering Wheel _____	17
Seat Belts _____	17
Wiper Motor and Components _____	17
Front Shock Absorbers _____	18
Front Coil Springs: _____	18
Exhaust System _____	18
Wheels _____	19
Tires _____	19
Radiator Hoses _____	20
Expansion Tank _____	20
Jack, etc. _____	20
PART NUMBERS AND SOURCES: _____	21
SOURCE MASTER LIST _____	25
TOOLS NEEDED _____	26
Shipping companies (partial list) _____	26
SUPPLIES NEEDED _____	27
 SECTION B: PARTS	
PREPARATION _____	29
ENGINE/components _____	31
Rear Suspension - jaguar _____	35
Rear suspension, E.R.A. _____	37
Shift handle _____	41
Shift Linkage _____	41
steering gear _____	42
Steering Column (Upper) _____	42
Wipers _____	43
DAMPERS AND SPRINGS _____	46
REAR HUB ADAPTERS- BOLT-ON WHEELS: _____	46
 SECTION C CHASSIS	
PREPARATION _____	47
BODY REMOVAL: _____	49
CHASSIS PAINT: _____	51
 SECTION D BODY/CHASSIS ASSEMBLY	
Interior panels _____	54
Horns _____	54
BRAKE AND CLUTCH PEDAL _____	56
BODY MOUNTING _____	56
Attach Rocker panels _____	57
BODY PREPARATION AND PAINT _____	58
Front Splash Panels _____	60
Fresh Air Inlet Ducts _____	60
fresh Air hoses _____	61
Rear wheelhouse panels _____	61

Detail Undercoating _____	61	Tunnel _____	99
Tonneau snaps _____	62	Carpets _____	101
Front brake scoops _____	62	Hand Brake Lever Cover _____	103
SECTION E _____	63	Seat mounting _____	104
CHASSIS ASSEMBLY _____	63	Seat belt/shoulder harness _____	104
BRAKE, FUEL LINES _____	65	Grill _____	105
Battery cables _____	65	BUMPERS/Jack-pads _____	105
SECTION F _____	67	Lights _____	106
MECHANICAL COMPONENTS _____	67	License plate light _____	107
FRONT SUSPENSION _____	68	BACK-UP LIGHT (optional) _____	107
REAR SUSPENSION, Jaguar _____	71	Mirrors _____	108
Rear suspension, E.R.A. _____	73	Grab handle _____	109
DRIVE SHAFT _____	74	Top Snaps _____	109
Voltage Regulator _____	75	Door trim _____	110
ENGINE AND TRANSMISSION _____	76	Emblems _____	110
LOWER STEERING COLUMN: _____	79	License plate(s) _____	111
SECTION G BODY II _____	81	Convertible top _____	112
WIRING AND ELECTRICAL _____	82	Side curtains _____	114
INTERIOR PANELS _____	83	Fitting the tonneau cover _____	114
Roll bar _____	88	SECTION H FINAL OPERATIONS	
RADIATOR/fans _____	88	_____	115
OIL COOLER (optional) _____	90	Install wiper arms _____	117
Fuel Tank _____	91	Brake Hydraulics _____	118
Fuel Filler Cap _____	91	Jacking the car _____	119
Windshield Wipers _____	92	Bolt-on wheel notes _____	119
Windshield Washer _____	93	Pin drive wheel notes _____	119
Windwings and sunvisors _____	93	SUSPENSION ADJUSTMENTS _____	120
Windshield _____	94	Brake balance adjustment _____	123
HEATER / DEFROSTER _____	95	Add Fluids _____	124
Dashboard _____	96	cooling system _____	124
Speedometer Cable _____	97	Headlight ADJUSTMENT _____	125
Battery and Cables _____	98	Final Checks _____	126
STEERING COLUMN and WHEEL _____	98	RECOMMENDED SERVICE _____	127
SHIFT LEVER _____	99	Fuses _____	127
		REFERENCE _____	128


SECTION A - PARTS NEEDED

PICKING UP YOUR KIT

The kit can be transported from our factory in an enclosed trailer, standard automobile trailer or rampback hauler. Shipping space for the parts in cartons will also be required, although most will fit inside the kit. We have used several shipping commercial companies with excellent results. See page 26 for names.

DIMENSIONS AND WEIGHTS

800 lb. bare + 200 lb. of boxes + 600 lb. for roller

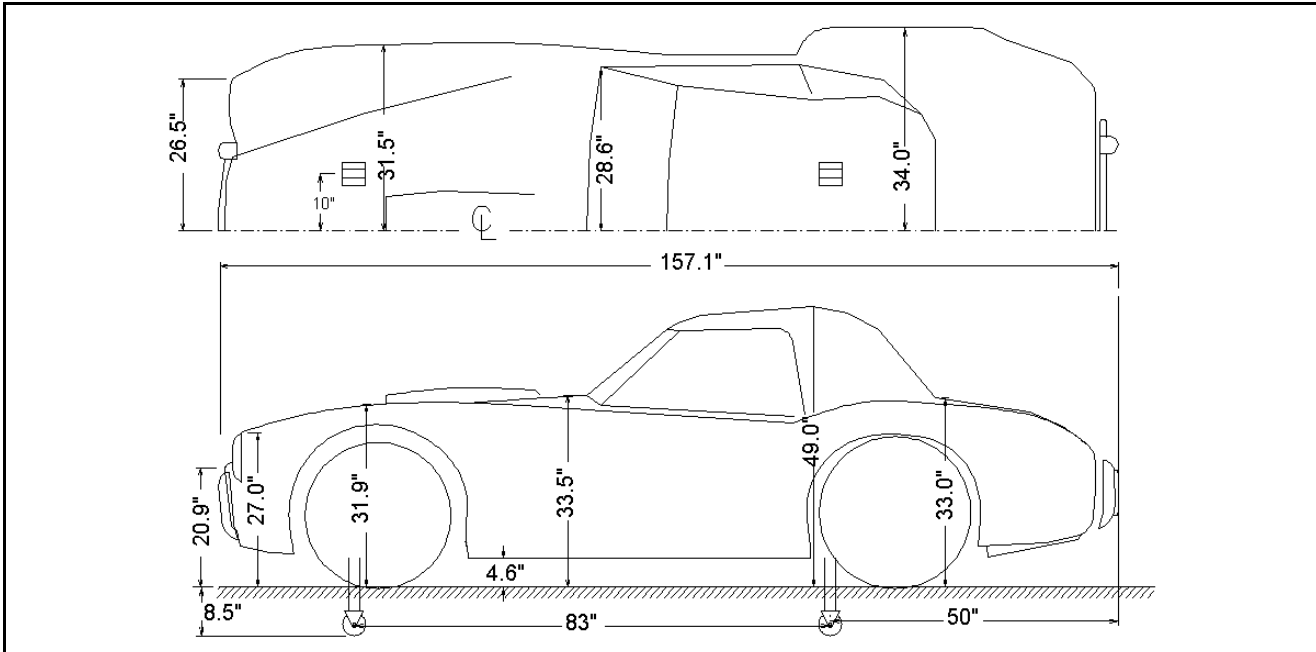

a:shipdim

TRAILER REQUIREMENTS

If you didn't buy a "roller" from us, the kit is usually shipped on the dolly wheels that we use for assembly if your trailer is well sprung. The dolly wheels require a \$300 **refundable** deposit. Many people keep the wheels until their kit is completed - it's very convenient for the kit to be mobile (and at the correct height) during construction.

The track of the Cobra dolly wheels is only about 20". Your trailer may require additional boards to support the dolly wheels. Without tires or dolly wheels, you can put tires as buffer between the chassis and the trailer. The kit will have to be lifted on and off the trailer manually. Have 3 strong friends to unload! If you're coming on a weekend to pick up your kit, please warn us if you aren't coming with extra people too. **Don't tie down the dolly wheels to secure the kit. Tie to the chassis or suspension.** In the absence of suspension pieces to tie to, wrap soft tie straps around the front crossmember and the upper mounting bolts for the rear subframe.

TIE-DOWNS

You or your shipping agent will require ratchet tie-downs, come-alongs and/or strong straps. We recommend either 4 diagonal connections or 2 longitudinal and 4 lateral ones for a total of 6. Don't forget that the **trailer must have anchor points to tie to**.

To avoid scratching the paint on the chassis, use 2" wide loops (or double 1" wide loops) or ratchet straps, 5000 lb. minimum rating. Make sure that your trailer has places to tie to. If you use chains or a come-along, bring padding or nylon straps for intermediate connections to the chassis.

INCLEMENT WEATHER:

A plastic cover will quickly shred at highway speeds. A high quality cloth car cover can be used to cover up the plastic, but it must be held down with rope all over. Looseness will allow any cover to quickly beat itself (and your paint job) to death.

SECTION A -PARTS NEEDED-

PART NUMBERS AND SOURCES:

Source addresses, etc. are found on page 25.

PART	PART NUMBER	SOURCE
Alternator Ford Small Block <i>Insert to reduce head threads</i>	Delco 321-147 (rebuilt) or any '70's Ford with separate regulator. F4ZZ-6E086-A - see mounting, page 31	Most Fords, 1971-1980 Ford
Ballast resistor	Nieh FF-109 / Borg RU-6 / SMP RU-4 / Wells F795, (1.4-1.6 ohms)	Aftermarket
Fan belt	Gates 7450 XL(most app's)	
Front Brakes, Suspension		
Brake Rotor/Hub (bolt-on wheels)	GM 334348 Bendix 141040	GM dealer or many (Front) GM cars 1970-78 (see page 17) GM dealer Local parts place
Brake Calipers (Front)	GM 18002421, 18003761 Rebuilds: Bendix L55001, L55002 (Includes pads)	
Pads	Bendix D52S (Semi-metallic for street use)	
Mounting pin kit		
Banjo bolt	GM 487293	
Dust Shield	GM 344023, 344024	GM dealer
Brake reservoir, standard optional (3)	BMW 34 32 1 112 399 ERA steel cans (optional)	ERA, BMW dealer
Bearings-Front Wheel		
Outer	GM 7450627, Timken LM11910/LM11949	GM or local auto parts
Inner	GM 7450630, Timken LM67010/LM67048	"
Seal, inner	GM 3966202, National 8871	"
Spindle nut	GM 387137	"
Spindle washer	GM 457707	"
Shock absorbers	Spax G135 PAS 200	E.R.A.
(See spec's on page 46)	Koni 8212-1126SPA1 (Double external damping adjustment w/aluminum body)	E.R.A., Summit Racing, Jegs
Coil Springs	12" x 250 lbs/in or 12" x 275 lbs/in (See page 18)	E.R.A., Carrera, Dillon, AFFCO, Eibach
Battery	Group 45 (preferred) or Group 51 (Get the heaviest duty possible in this size)	Misc.
Bell-housing See mod's necessary on page 32.	Lakewood 15202 for Top-Loader, R.G. Lakewood 15203 for T-5, Tremec	Various, E.R.A.
Cables, Battery		
Trans case to chassis ground	12" long, (7/16")eye/eye woven style	E.R.A., parts supplier
Battery pos to starter solenoid	135" long, eye/terminal clamp (1 gage min.) <i>If you want an in-line cutoff, see page 66.</i>	" "
Battery neg to ground	32" long, eye/terminal clamp (1 gage min.)	" "
Starter solenoid to starter	24" long, eye/eye (4 gage min.)	" "
Drive Shaft Components	(see page 41 for parts reference)	

SECTION A -PARTS NEEDED-

<p>ENGINES AND ENGINE PARTS</p> <p>Mounts Ford 260, 289, 302, 351</p> <p>Oil Pan, Extra Capacity 289-351W</p> <p>351 Cleveland Oil Filter</p>	<p>Complete rebuilt Ford units are available from several suppliers</p> <p>63-65 Mustang w/260-289 cid, Ford C4DZ-6038A (right), C4DZ-6038B (left) Republic 31-2221 (right), 31-2220 (left) MityMount (HD) FM132</p> <p>Custom steel pan as used on original Cobra. The pan can have a maximum depth of 8.5", F or R sump. Deeper pans will hang below the chassis.</p> <p>Canton 15-710 pan, 15-711 pickup See the note on page 17.</p>	<p>Ask us</p> <p>Aftermarket, Mustangs Unlimited, E.R.A., Dealer</p> <p>E.R.A., Canton Racing Products, Aviaid</p>
<p>Exhaust System</p>	<p>Under-car-complete Competition style pipes w/primaries:</p>	<p>E.R.A. E.R.A.</p>
<p>Fuel Filter</p>	<p>In-line between tank and steel line on chassis ($\frac{3}{8}$")</p>	<p>local auto parts store</p>
<p>Hand Brake Lever or Hand Brake Lever Cable Emergency brake linkage, ERA rear suspension</p>	<p>Jaguar XKE Series I, II (1961-1970) E.R.A. Reproduction Lever Custom for E.R.A. subframe Custom, by E.R.A.</p>	<p>Jaguar Dealer E.R.A. E.R.A.</p>
<p>Cooling system parts Water neck/thermostat housing Hoses: Upper Lower w/L or R outlet Bypass Heater</p>	<p>Ford Motorsport M8592-B302 (angled 30deg up)</p> <p>Gates 21178 or equivalent (requires trimming) Gates 20390 or equivalent (See page 35 for trim) Gates 28466 ($\frac{5}{8}$" x $\frac{5}{8}$"), 28474 ($\frac{3}{4}$" x $\frac{3}{4}$") or 20662 ($\frac{5}{8}$" x $\frac{3}{4}$") Gates 28472 (to thermostat housing) $\frac{5}{8}$" ID straight hose (~50" to water pump)</p>	<p>Local auto parts store</p>
<p>Radiator expansion tank</p>	<p>Harrison 3155416</p>	<p>E.R.A.</p>

SECTION A -PARTS NEEDED-

<p>Rear suspension</p> <p>Jaguar Rear Suspension Assembly (Core)</p> <p>Sub-frame</p> <p>Rebuilding Parts for rear suspension</p> <p>Coil-over dampers</p> <p>Standard XKE W/O height adjustment</p> <p>Height adjustable</p> <p>Coil Spring (4 rqd) - std Spax</p> <p>Spax with height adjustment</p>	<p>Jaguar based or custom ERA design with outboard brakes.</p> <p>1964-1974 Jaguar XKE, Series 2, 1965-1983 Jaguar XJ-6</p> <p>Custom E.R.A. for Jag based or ERA outboard braked design</p> <p>Bearings, brake parts, etc., see page 128</p> <p>See length specifications on page 46.</p> <p>Spax S 200/415 (Externally adjustable damping)</p> <p>Spax G640 S200</p> <p>10" x 350 lbs/in</p> <p>8" x 350 lbs/in</p>	<p>Wrecking yard or E.R.A.</p> <p>E.R.A.</p> <p>SICP, E.R.A., Jag Dealer</p> <p>E.R.A.(Jag rear)</p> <p>E.R.A.</p> <p>E.R.A., Carrera, Dillon, AFFCO, Eibach</p>
<p>Differential/LSD rebuilding</p>	<p>Various ratios of Dana 44 gears</p>	<p>Reider Racing/Michigan Driveline</p>
<p>Spare Tire</p>	<p>Space Saver w/ 4 3/4" bolt circle (Bolt-on wheels only)</p>	<p>G.M. cars</p>
<p>Speedo cable drive <i>Richmond Gear</i></p>	<p><u><i>See notes on page 13 and 15 for gears</i></u> Cable: Champ 400020 Adapter: GM 345212 O Ring: 7/8"OD x 5/8"ID Retainer: 3708148 Drive gear: GM 39879XX where XX=number of teeth</p>	<p>E.R.A., dealer, auto parts store</p>
<p>Speedo cable, drive gears, etc. <u>Top Loader, T-5, Tremec</u></p> <p>Cable</p> <p>Speedo drive gear</p> <p>Speedo driven gears</p> <p>Retaining clip</p>	<p><u><i>See calculation notes on page 15.</i></u></p> <p>AC 11589234 ('67 Mustang)</p> <p>C4DZ-17285A (LH, 7 tooth, black)</p> <p>C8AZ-17285A (RH, 7 tooth, yellow)</p> <p>20LH tooth: C2DZ-17271H</p> <p>19LH tooth: C4DZ-17271A</p> <p>18LH tooth: C2DZ-17271K</p> <p>17LH tooth: C2DZ-17271G</p> <p>C1DZ-17292A</p>	<p>E.R.A., Dan Williams</p> <p>Ford dealer</p>
<p>Steering gear</p>	<p>Subaru 631-300-540 (Subaru 1977-79 Stage 2)</p>	<p>E.R.A., Dealer, wrecking yard</p>
<p>Steering column, upper</p> <p>Steering wheel</p> <p>Wheel hub-Triumph column</p> <p>E.R.A. column</p> <p>Steering wheel Center button</p>	<p>E.R.A. Reproduction or Triumph Spitfire, GT-6 (1972-mid 1977)</p> <p>Moto-Lita</p> <p>Moto-Lita (wheel must be drilled for pattern)</p> <p>Comes with E.R.A. column</p> <p>Reproduction of original either "AC" or "Cobra" motif</p>	<p>E.R.A., wrecking yard</p> <p>E.R.A.</p> <p>E.R.A.</p> <p>E.R.A.</p>

SECTION A -PARTS NEEDED-


<p>Transmission: See notes on page12.</p>	<p>Ford Top Loader T-5, Tremec Richmond Gear 5-spd</p>	<p>Dan Williams, GT Performance Mustangs Unlimited, GT Performance E.R.A., Richmond Gear</p>
<p>Mounts: <i>Ford Top-loader w/ 2 holes along longitudinal centerline or 2 holes perpendicular to centerline 5.6" apart</i> Ford C-6 Automatic Ford T-5. Richmond Gear, Tremec 5 speed Throw-out fork Pivot bracket for above</p>	<p>Ford C8ZZ-6068 A, or Republic 31-2284 Ford C9AZ-6068H, or Republic 31-2375 Ford C8ZZ-6068 A, or Republic 31-2284 Republic 31-2224 Tremec requires adapter from E.R.A. Ford C8OZ-7515D (must be narrowed for all but big spline Top Loader) Ford C8AZ-7522B</p>	<p>Ford dealer, E.R.A., Mustangs Unlimited, auto parts supplier " " " " Auto parts supplier Dealer, E.R.A. Dealer, E.R.A.</p>
<p>Shift Linkage (4-spd. Top-loader) Richmond Gear 5 speed</p>	<p>Original Ford unit, Hurst or other after-market units Long or Hurst</p>	<p>Mid-sixties Ford E.R.A.</p>
<p>Shift Lever: duplicates original</p>	<p>To adapt to all transmissions</p>	<p>E.R.A., 1965-67 Mustang and some other Ford cars of this period</p>
<p>Voltage Regulator</p>	<p>Ford Regulator D4TZ-10316 A, D9PZ-10316 A or aftermarket equivalent for 1967-on Ford alternator with external regulator.</p>	<p>Ford dealer, E.R.A. has electronic regulators with the sam cover that the mechanical regulator (NLA) used.</p>
<p>Windshield Wipers Motor and Drive Parts Arms Blades Chrome Bezels (Bush Kit)</p>	<p>From 1969-1976 Triumph Spitfire, GT-6 or TR-6 Lucas BHA-520I Lucas GWB-164 Lucas 60600 429</p>	<p>E.R.A. E.R.A., Lucas parts dealer E.R.A., E.R.A., Lucas parts dealer</p>
<p>Wheels: Bolt-on Pin-drive Spare Tire/Wheel (Bolt-on)</p>	<p>American Racing Torq-Thrust, 15" x 7", 15" x 8.5" For 12" brakes, see notes on page 17. 7½ x 15 and 9½ x 15 Various widths in 17" GM (Camaro) space saver *See note on page 119.</p>	<p>Summit Racing, others E.R.A., PS Engineering</p>

SECTION B - PARTS PREPARATION

RADIATOR HOSES:

LOWER


A single hose hose can be cut to function as the two connectors used between the radiator and water pump. Cut and trim the hoses as shown, as appropriate for the exit side of your water pump. See page 89 for installation of the hoses.

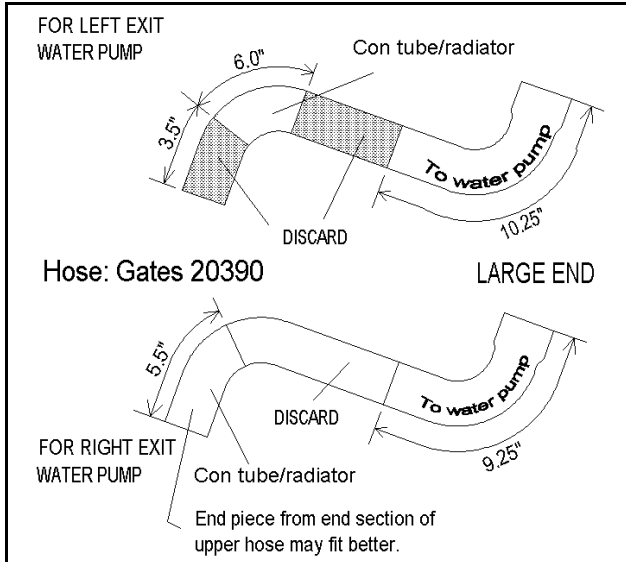

fia\man\b\LWATHOSE

UPPER

4 bbl and single outlet Weber manifold

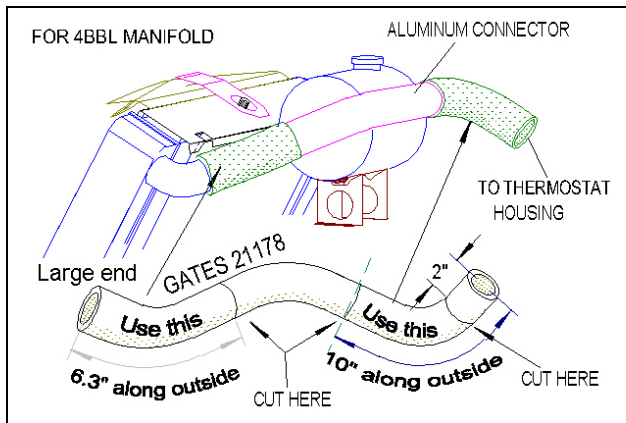


b\uwathose1

Use a short neck thermostat housing (20° up) on the intake manifold. Cut and trim the hose as shown:

Weber Manifold (two outlets)

Use a drilled freeze plug in the upper hose to restrict flow.

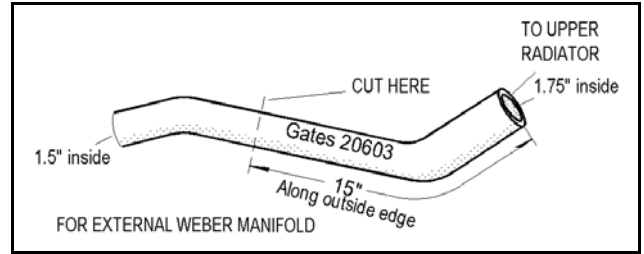

fia\man\b\uwathose2

SMALL HOSES:

If you are not using a heater, connect the water pump inlet to the expansion tank.

REAR SUSPENSION - JAGUAR

DISASSEMBLY

Components must be thoroughly checked and rebuilt if necessary: brake calipers, emergency brake pads and linkage, universal joints on half-shafts, hub carrier and lower control arm bearings. Bearings, etc. are listed on page 128. We have found that the **Spicer®** U-joints listed are the only brand that meets the standards required of the Jaguar half-shafts (and we've tried quite a few).

Replace any corroded or damaged brake lines. Be sure to use lines with the proper end flare and fittings. Note that some British fittings have a convex (bubble) flare that mates with a concave receptacle in the caliper. While this is similar to some metric fittings, the threads are SAE. It is not possible to make these flares with a conventional flaring tool. Aftermarket suppliers and Jaguar dealers have these British style lines.

Mount the brass junction block on the left front of the cage, with the fitting for the flex hose up. If your rear suspension core has the junction block pointing forward, fabricate a small bracket from 1/8" steel strap. Install the hose (mounted on the chassis, originally) onto the junction with a copper "O" ring.

SECTION B - PARTS PREPARATION


CONTROL ARMS

Install a male (right-hand-thread) rod end onto each front lower radius arm so that the bushing center to rod end center distance is 16". Leave the jam nuts loose.

Install the steel brake lines onto the subframe.

Install the front lower radius arms onto the lower differential bracket as shown, leaving the inner bolt loose.


Install the coil-over damper onto the upper mount using a $\frac{1}{2}$ " x $2\frac{3}{4}$ "L bolt with flat washers and stover nut. Install the coil-over onto the lower arm (spacers, too), tightening the top and bottom bolts.

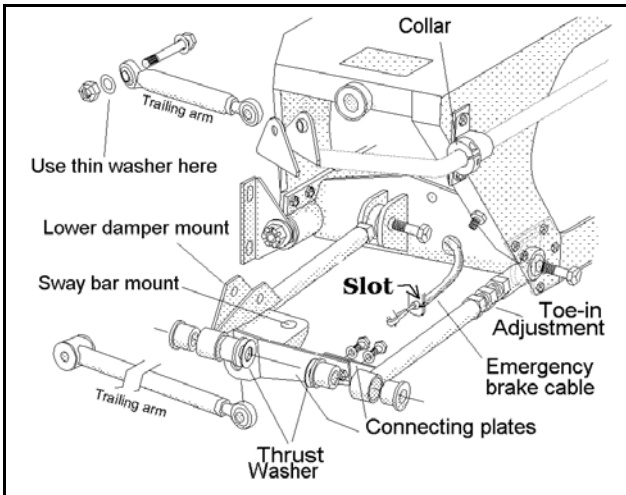

fia\man\d\rsasblyt

Insert the thrust washers and inner bushings into the hub carrier assembly. Lightly lubricate the inside with heavy grease (silicone or moly base is best). Install the hub carrier onto the front radius arm. Loosely install the second bush half, washer and castle nut.

Install the rear radius arm onto the hub carrier in the same manner. Slide the other (inside) end into the bracket on the subframe and temporarily secure with a bolt. Insert the $\frac{3}{8}$ "-16 x $\frac{5}{8}$ "L bolts through the connecting plates. Tighten each castle nut to 15 lb-ft and back off to the nearest hole. Secure with a cotter pin.

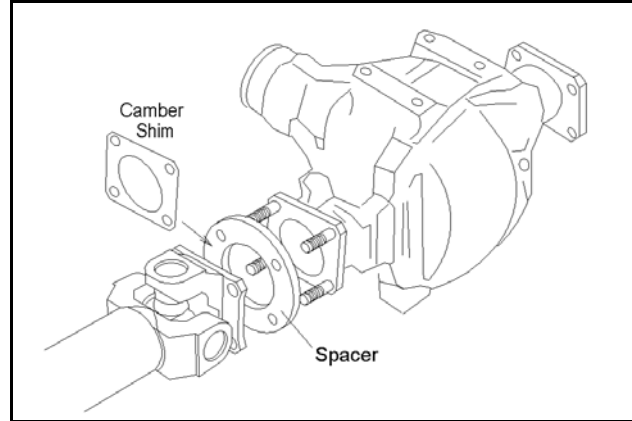

fia\man\d\hsaxflg

Bolt the half-shaft inner ends and spacer onto each differential output flange. If you wish, install Jaguar shims with about .060" total thickness between the half-shaft and the spacer. This will make minor camber adjustments easier after basic alignment has been done.

Slide the axle into the hub carrier, using a small amount of light grease on the splines. For competition, you might want to use a little shaft-and-bearing mount on the splines, but be aware that disassembly requires heat. Secure with a flat washer and castle nut.

Tighten all the lower hub carrier pivot shaft nuts to 20 lbft, back off $\frac{1}{3}$ of a turn to the nearest cotter pin hole and insert cotter pin. Insert any shim washers necessary between the rear flank of the rod ends and the cage bracket. Install a flat washer and lock nut.

Install the caliper using M10 x 30 allen screws and ribbed lock washers.

Install the upper trailing arm bracket with bolts, flat washers and lock nuts so that the bracket angles in toward the front.


Install the upper trailing arms onto the hub carrier bracket.

Install the lower trailing arm onto the lower radius arm with flat washers and lock nut. Tighten nut to 35 lbft. The front of the trailing arm is attached the same as the Jag suspension.

EMERGENCY BRAKE CABLE

Route the long cables through the hole in the subframe as shown above. Pass it through the internal holes, the holes above the front mount (page 39), and into the balance bar shown on page 36. If you supplied the calipers, cut a slot in the cable mount big enough for the cable to fit through.

FOOTBOXES

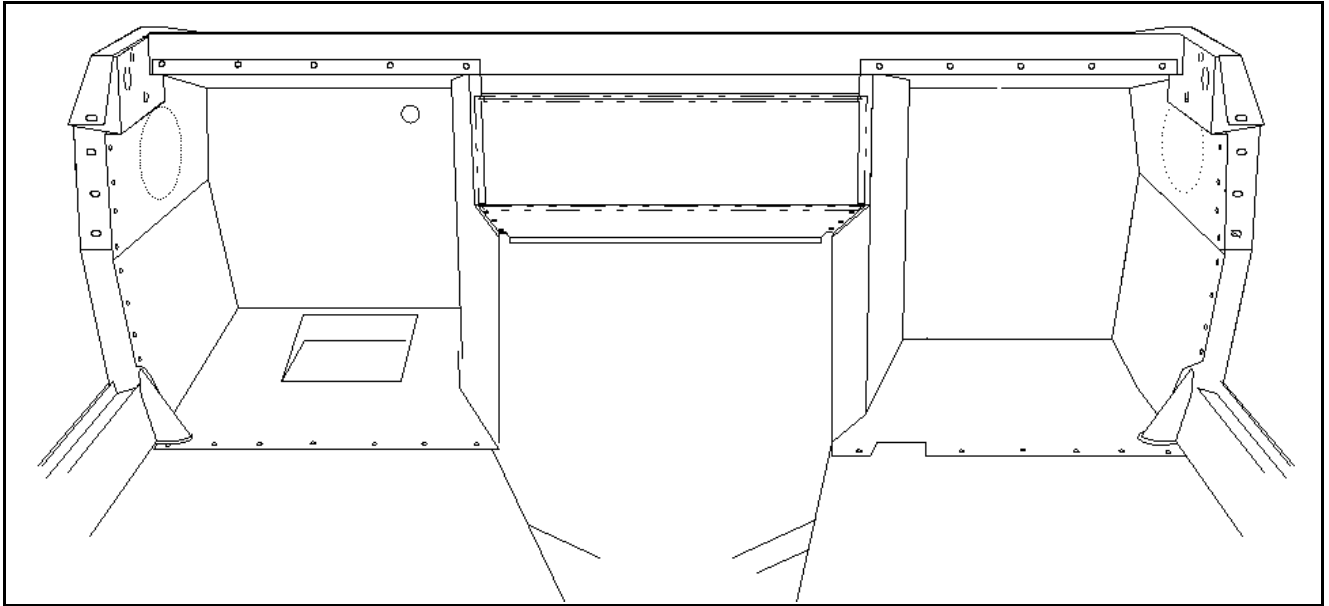

D/footbox

For installation of stereo speakers in the sides of the footboxes, holes must be cut into the fiberglass. Inquire for the exact location of the holes and recommended speaker size.


RIGHT

Push the box forward into the corner and clamp into place so that the original assembly holes line up. If there are no problems, remove the footbox, apply caulking, and fasten the foot box to the chassis in the same manner as the floors.

LEFT

Lift the footbox up and slip in from the center of the car towards the outside. Don't rivet the area where the foot boxes overlap one another. (The rivets will show in the engine compartment) Just add sealant and rivet the portion against the transverse support tube and the lower rear section that extends towards the transmission. Footbox components

FRESH AIR CONTROL VALVES

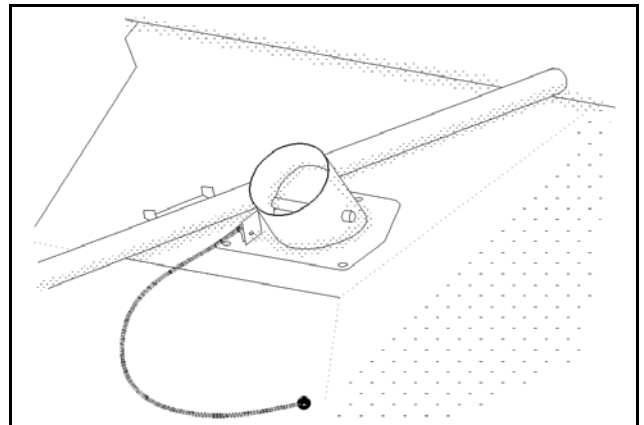


d/vent

(Passenger's side assembly is a mirror image.)

Screw on top of the drivers foot box after putting a bead of caulk on the bottom flange.

Clamp the duct hose in place. The actuating cable will be attached later.

BRAKE AND CLUTCH PEDAL

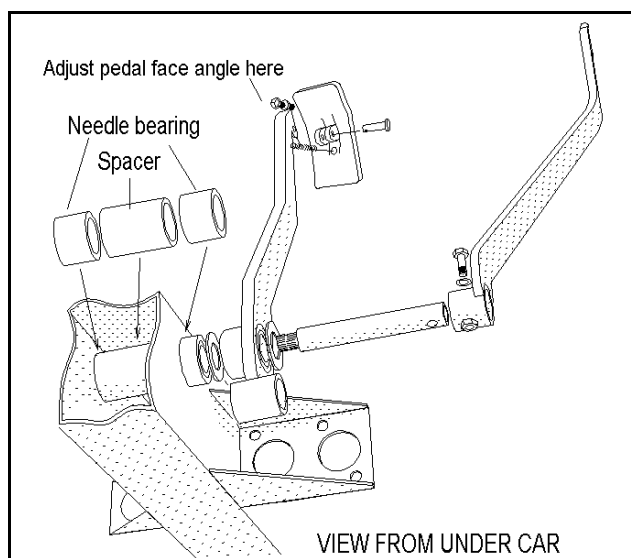

fbrpedal

INSTALLATION

If necessary, clean and grease the needle bearings in the chassis and in the brake pedal.

Slide the pivot shaft through the chassis bearings with the splined end toward the inside. If the engine is installed, the shaft must be installed from the outside of the chassis.

Install the thrust washer(s), brake pedal and clutch pedal onto the shaft. Secure the clutch pedal with the shoulder screw.

Install the clutch throw-out arm onto the splined end of the shaft. Orient the throw-out arm approximately opposite the pedal. See the illustration on page 117.


To adjust the orientation of the clutch arm, change the length of the connecting rod between the clutch pedal throw-out arm and the clutch master cylinder:

Remove the retaining clip and the clevis pin.

Loosen the jam nut at the clevis. Turn the threaded rod to change the length as necessary. When finished, tighten the arm set screw.

For **balance bar** parts installation, see page 123.

Temporarily install the brake master box. It will have to be removed later to connect the brake switch wiring.

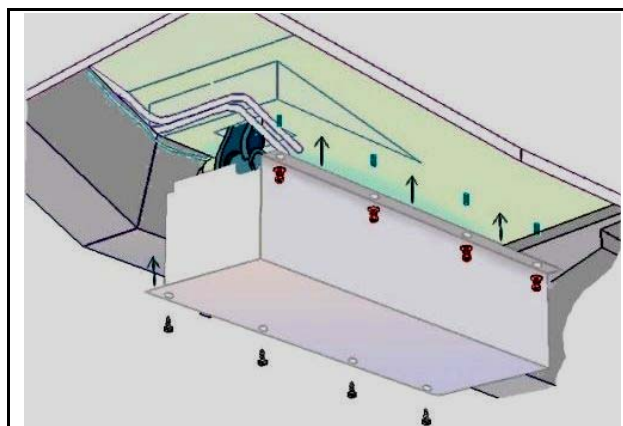

BODY MOUNTING

Preparation Is Everything! Before starting, have all tools and materials ready and read the text below.

Attach the body with sealant and rivets. With assistance, carefully spread the body sides while slipping the lower body flanges over the door hinge mounts. Lower the body down over the cowl supports and onto the chassis. Watch for the left front brake line that runs behind the wheelhouse panel. Use small blocks of wood, etc. to keep the body at least 3" above the bonding strips and chassis.

Mix a trial batch of bonding adhesive (see "Supplies and Materials" on page 27) to check the set-up time before you start. You must have enough time to apply the adhesive and carry out all the subsequent installation steps before hardening. Use less catalyst or hardener to increase working time.

Use a caulking gun to apply body sealant (also used on the floors and foot boxes) to the chassis and corresponding body parts.

Apply the bonding adhesive between the surfaces indicated on the diagram.

Check the body and chassis seams from underneath and seal openings with either the brush-on undercoating or the caulking used to mount the body. Pay particular attention to the rear closing panels where they overlap onto the upper trunk panel and the junction at the upper front corner of these panels.

If you wish to rust-proof the inside of the chassis main rails, drill holes in the bottom of the chassis at the front and rear of the bottom rails. You may then spray a wax type material into the chassis, even up above the rear suspension. Close the holes with plastic or metal plugs.




TONNEAU SNAPS

This operation can be left until last, so that the paint can be buffed one final time.

Chase the holes with a #25 drill (.150"). Install the tonneau snaps with the fiber washers. Don't force! The snap screws may twist off, leaving you with half a broken screw in the body. For extra safety and ease, use a #10 steel screw to "chase" the threads into the fiberglass before you install the snaps.

FRONT BRAKE SCOOPS

Using two #10 sheet metal screws, mount the scoops 5.4" from the centerline of the car and set back as shown. A strap attached to the inside of the chassis supports the rear edge.

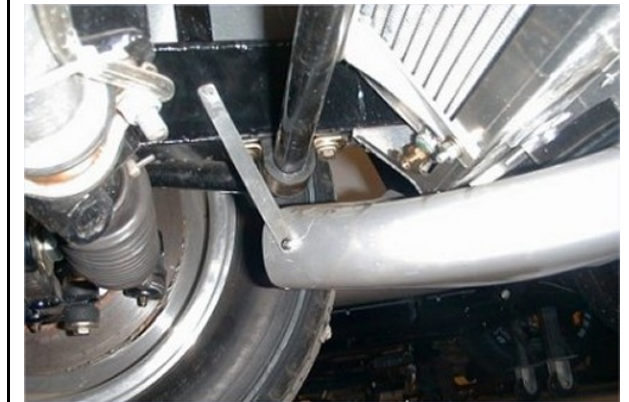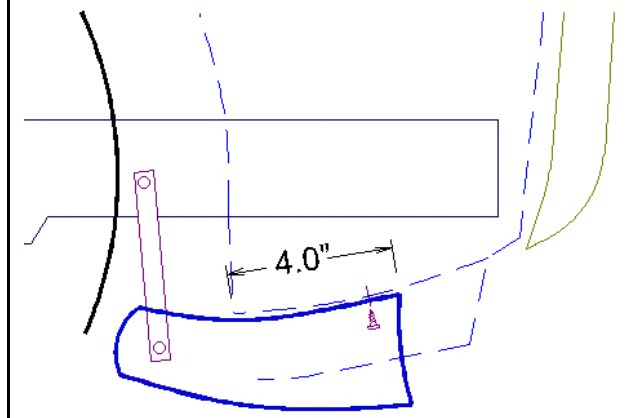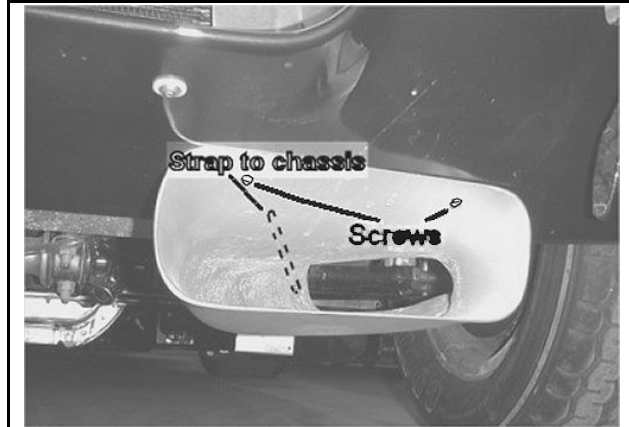

SECTION F -MECHANICAL COMPONENTS-

FRONT SUSPENSION


LOWER CONTROL ARM

Lubricate the chassis receptacle/brackets and the sides of the control arm bushings with silicone grease or petroleum jelly. Use a gentle oscillating motion when inserting the control arm into the mounts.

Insert the 5 1/2" x 5/8" bolt with a heavy washer through the front bushing into the chassis. Use a flat washer under the lock-nut.

Use the 3" x 5/8" bolt through the rear mount with flat washers and lock-nut.

Torque the pivot bolts to 50 ft-lb.

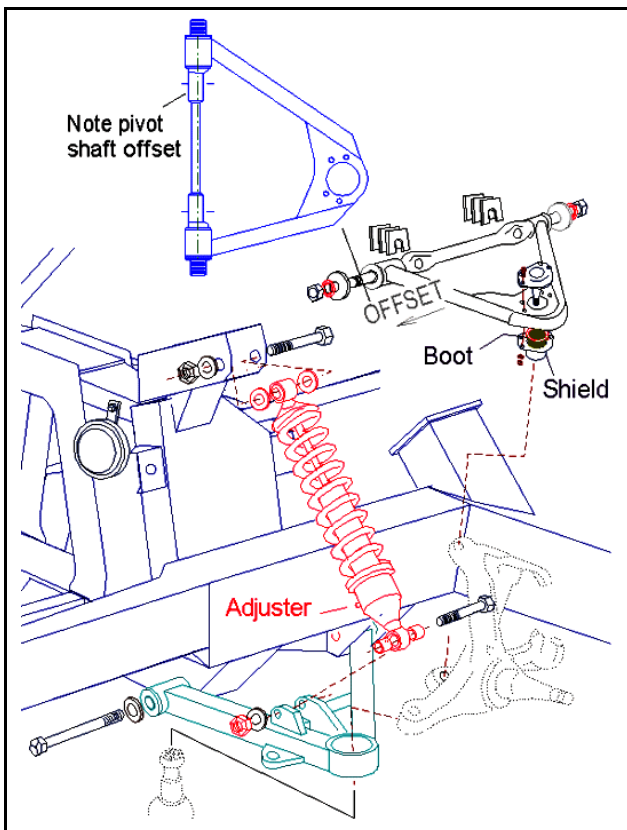

fi\man\d\fsusp

UPPER CONTROL ARM

The arms are installed with the ball joint hole **offset** towards the **front** of the car. The inner pivot axis is offset to the **outside** of the chassis mount. See above. Use a little silicone sealer where the ball joint passes through the hole in the control arm. This will prevent grease from leaking out of the rubber boot.

Install the arms with 3 shims front and rear between the pivot shaft and the chassis mounting brackets as a preliminary camber setting. Leave the pivot shaft end nuts slightly loose. Tighten the nuts to 60 lbft after the suspension is at normal ride height.

STEERING KNUCKLE

Install the knuckle on the lower ball joint with a washer and nut. Torque to 40 lb-ft. Tighten further to where the cotter pin can be inserted.

Rotate the upper control arm down, engaging the ball joint stud into the knuckle.


Install washers and nuts, torque to 30 lb-ft minimum and install cotter pin at the next line-up.

Insert the tie rod stud into the steering arm from the bottom. Fit the washer and nut, torquing to 20 lb-ft minimum. Install the cotter pin.

If you have difficulty getting **grease** into a ball joint, back off the Zerk fitting about one turn.

ROTOR/HUB


GM BRAKES

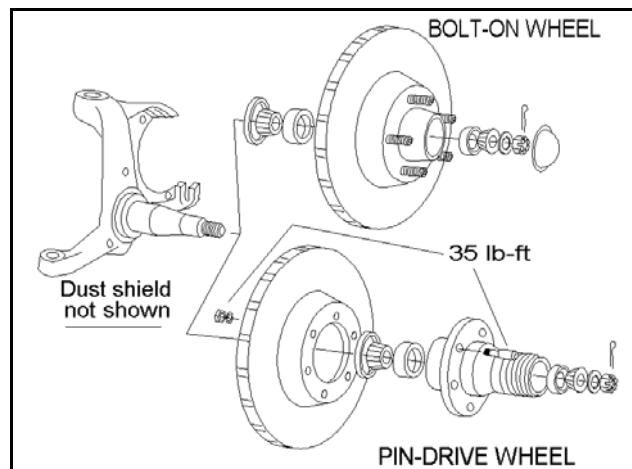

d\fnubasb


SECTION F -MECHANICAL COMPONENTS-

12" BRAKES: HUB AND ROTOR MOUNTING

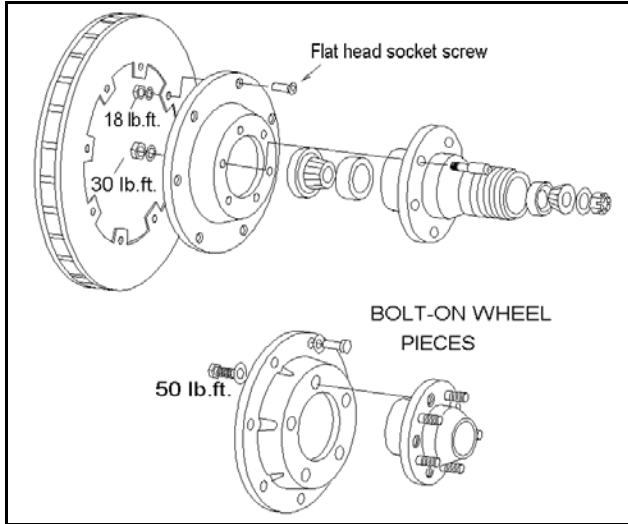


fjzf-2.gif

OPTIONAL WILWOOD CALIPER MOUNTING

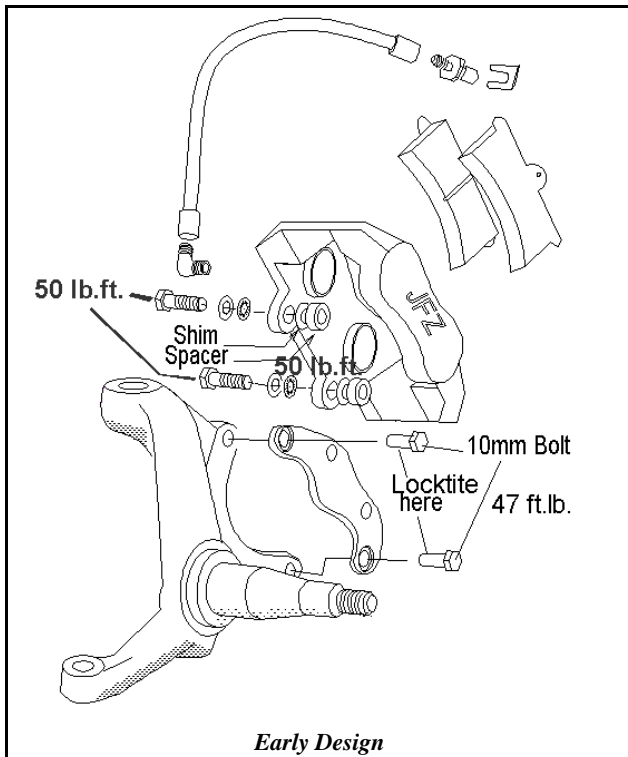

Early Design

fjzf-1

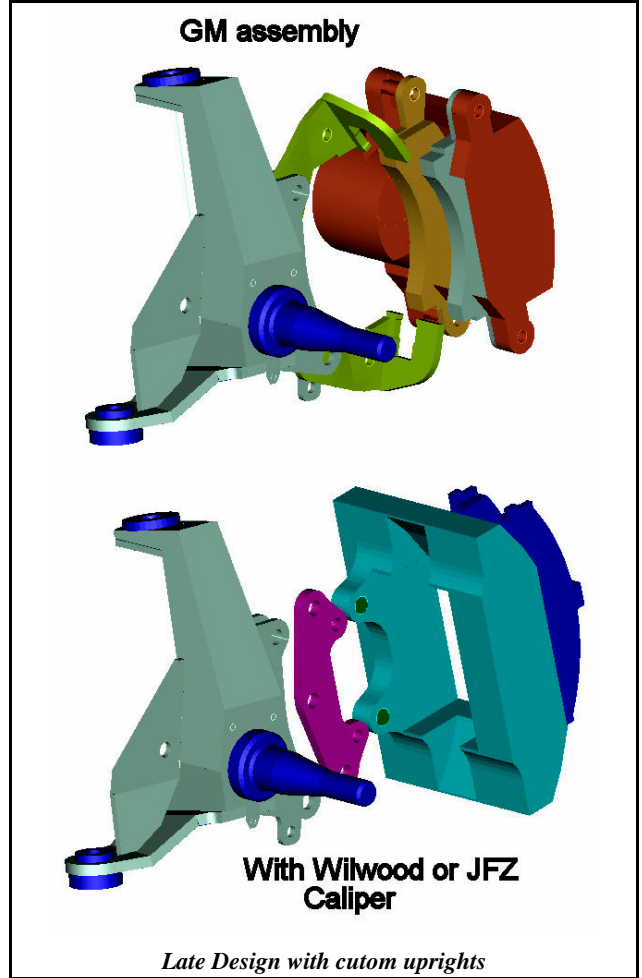

GENERAL INSTALLATION

Replacement parts are listed on page 128.

Pin drive: If the rotor is not already installed on the pin drive hub, **torque** the drive pins to 35 lb-ft (with high-strength thread locking compound, i.e. Locktite® red) and the nuts to 35 lb-ft.

If you ever need to remove the pins, they will have to be heated to 300 deg. to weaken the bond. **Excessive heat** will weaken the pins.

Always grind the rotor after installing the wheel bearing races. If you don't have a special driver for the races, let the auto machine shop install them.

Clean off the **grinding dust** thoroughly before putting grease in the hub and installing the bearings and inner seals.

Install the **dust shields** onto the steering knuckles if desired.

Install the hub onto the stub axle with a special (tanged) washer and castle nut.

SECTION F -MECHANICAL COMPONENTS-

With new wheel bearings, torque the **axle nut** to 20 lb-ft. Loosen the nut and re-torque to 15 lb-inches, then tighten to the nearest cotter pin hole. Install the cotter pin through the access hole in the side of the pin-drive hub.

Install the brake calipers and pads using new hardware kits. Use **silicone grease** on all sliding surfaces.

Connect the brake line to the caliper, using the supplied banjo bolt and copper washer. If you still get seepage past the copper washer but the seat is not too bad, you may use a special sealing washer available from Earls or E.R.A.


COIL-OVER DAMPER

See page 68. **Spacers** for the lower mounts are provided with the dampers. Orient the damping screw adjuster toward the centerline of the car. Use a washer on either side of the top mount. Secure the top with a 2 $\frac{3}{4}$ " long bolt in from the back. A 2 $\frac{1}{2}$ " bolt is supplied for the bottom attachment. Again, slide the bolt in from the back.

STEERING GEAR

With the ERA Mustang steering gear conversion, the lower steering column must be installed before the steering gear. See page 79.

Prepare the rack and pinion assembly as described on page 42.

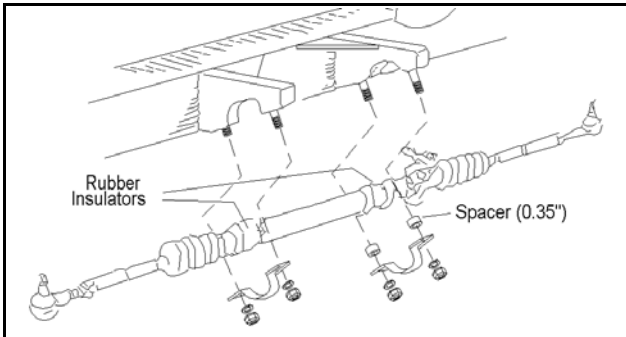


d/subaru

Raise the rack into position into the chassis mounts and secure with the mounting clamps provided. Note the spacers used between the left side clamp and the chassis. Torque the nuts to 18 lbft.

ANTI-SWAY BAR

Threaded holes are already on the chassis. Chase any paint in the threads before installing the ($\frac{3}{16}$ -18) bolts, washers and nuts. The $\frac{15}{16}$ " front bar is mounted under the front frame extensions, just behind the radiator.

- Bolt the bar in place with the rubber/urethane bushes and clamps. The ends slant up slightly toward the outside.
- Install the connecting links between the tab on the lower control arm and the pads on the ends of the sway bar.
- Tighten the link bolts so that the rubber bush expands to the diameter of the cupped washer. Do not over-tighten.

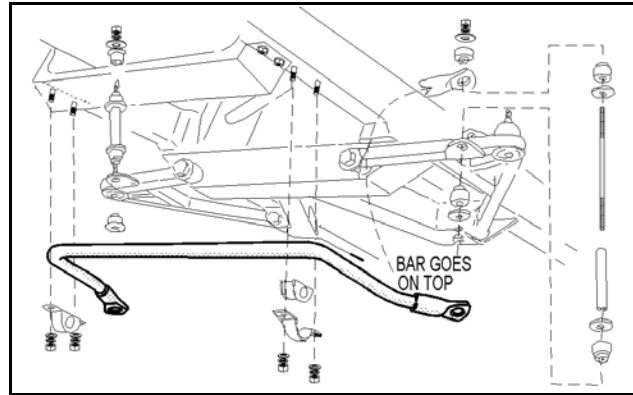


d/swapayb

SECTION F -MECHANICAL COMPONENTS-

REAR SUSPENSION, JAGUAR


INSTALLATION

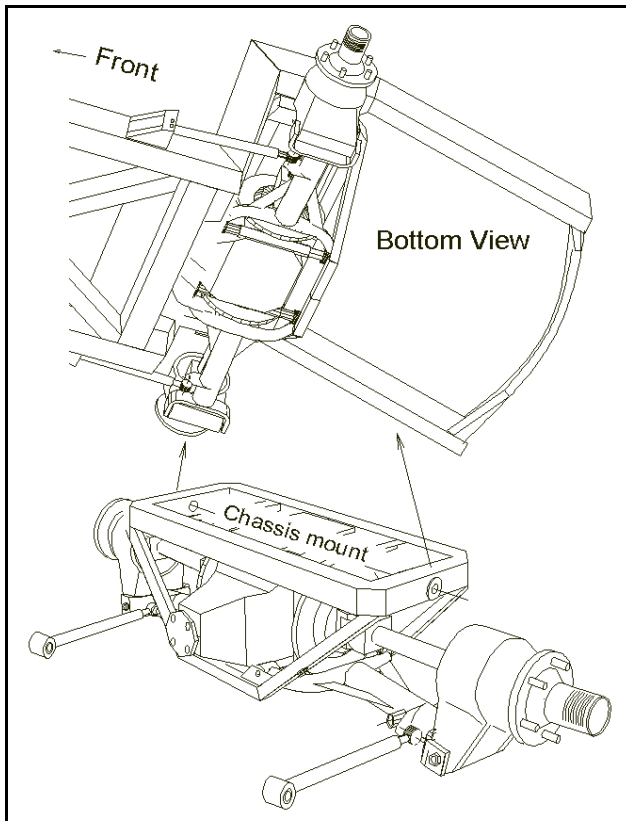

d/jagrs

Thread the trailing arms onto the rod-ends (with jam nuts) already installed on the lower control arms. See page 37. Thread on until two or three threads are left showing, but leave the jam nuts loose.


Support the chassis with jack-stands so that there is at least 19"-20" between the spare tire well bottom and the floor. This will allow you to fit the assembly on the jack and still slide it under the car from the back.

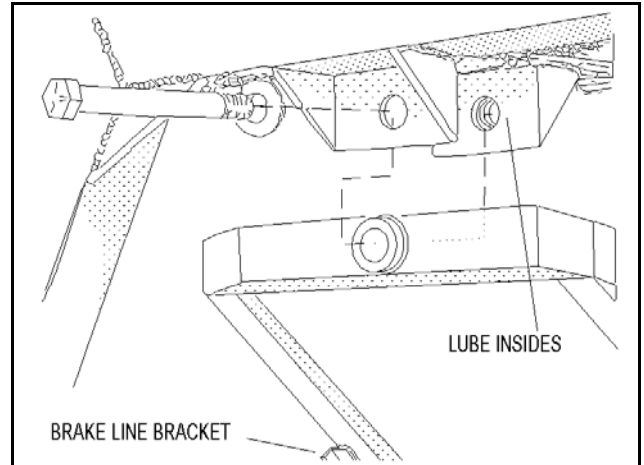

d/eracage

Raise the rear suspension assembly into position with a floor jack, guiding the forward ends of both trailing arms into the brackets on the sides of the frame.

Lubricate the insides of the upper chassis brackets with lithium grease so that the sides of the rubber bushing will slide into them. Guide the suspension assembly into the chassis brackets. Using a little light oil on the threads, install the $\frac{5}{8}$ " bolts with flat washers, but don't tighten yet.

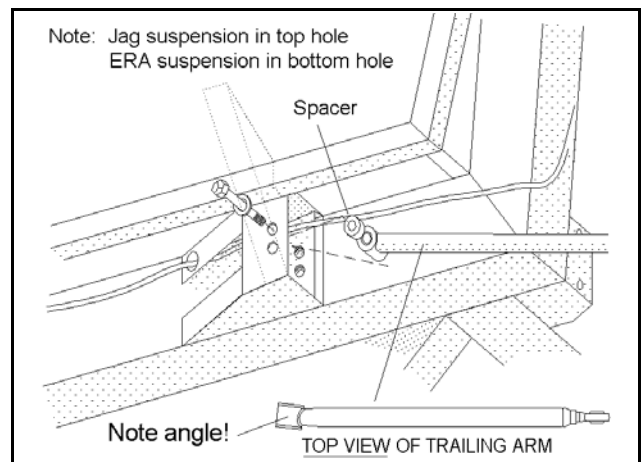

f/a\man\dl\trailarm


Note that the trailing arm bushing is **angled** slightly relative to the trailing arm tube.

On one side of the car: Rotate the trailing arm so that the bushing angle matches the chassis bracket. Holding the bushing against the inside of the chassis bracket, sight through from the outside hole. Use a large screwdriver to move the assembly so that the sight is straight into the threaded portion of the chassis bracket.

SECTION F -MECHANICAL COMPONENTS-

ACCELERATOR PEDAL AND LINKAGE

All components come preassembled in the standard kit. See also the picture on page 67.

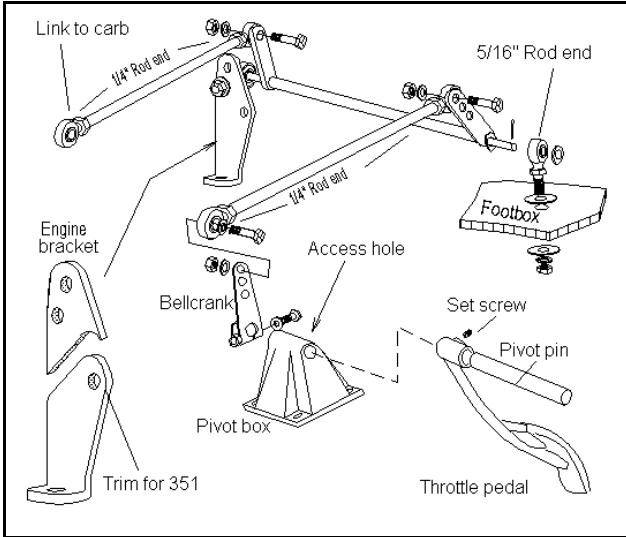

d/throtlink

When assembling the longitudinal links onto the sides of the bellcranks, pick the straightest front-to-rear paths. The diagram above is typical but may not be ideal for your setup.

To remove the pedal from the pivot box, remove the setscrew through the access hole in the casting. Remove the bellcrank and slide the shaft out.

ADJUSTING THE LINKAGE

Wire the carburetor linkage fully open.

Install the cross-shaft support onto the engine, orienting it so that the shaft is as parallel to the firewall as possible and fairly horizontal.

Install the link from the carb to the cross-shaft, adjusting the length so that the cross-shaft bellcrank is angled back, about 30 degrees toward the firewall.

Adjust the bellcrank on the pedal shaft so that it is angled back toward the firewall about 20 degrees when the pedal is bottomed out on the floor.

Install the link from the pedal to the cross-shaft so that the pedal is about $\frac{1}{2}$ " from hitting the floor.

Remove the wire holding the carburetor linkage and check whether the pedal is at a convenient height.

If it is too high, change the link footbox link to a lower hole on the cross-shaft. If it is too low, change the engine link to a lower hole on the cross-shaft.


Install the return springs and check whether you're still getting full throttle.

Tighten all bolts and jam nuts, check for interference, and grease all the pivot points.

If you want the "smooth look" shown below, cut some $\frac{5}{16}$ " brake line to length to cover the middle section of the threaded rods.

Note: This linkage can be adapted to most engines. If yours requires something different, call us.

For **Weber carburetors**, a duplicate of the original bellcrank pivot stand is available from E.R.A. If you are using a blow shield with a wide flange on a 289/302, the flange must be trimmed around the bracket.

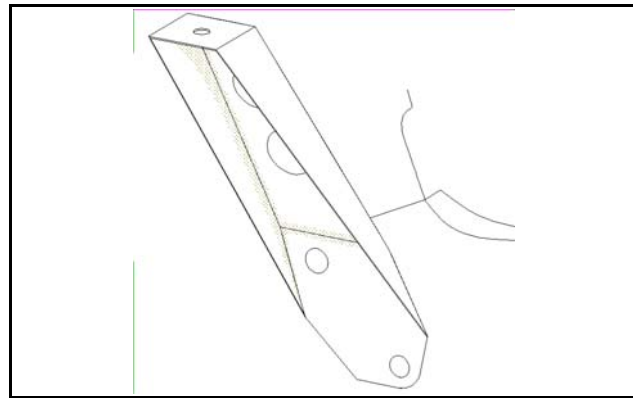

ENGINE AND TRANSMISSION


Refer to page 31 for engine and transmission preparation. **To check compatibility**, trial fit the transmission to the engine **before** any attempt to install either into the chassis. Note that **the engine and transmission are offset toward the passenger side of the car** by one inch to balance the driver's weight and to give more legroom for the driver.

If you are using a blow shield, check the **concentricity** of the hole that locates the transmission. Put a dial indicator on the flywheel and indicate the hole ID. If the eccentricity exceeds the recommendations (generally about 0.010"), you must use **offset dowels** to locate the bell housing on the engine block.

SECTION G - BODY II

HOOD STAY

The upper and lower hood stay brackets are (factory) attached as shown.

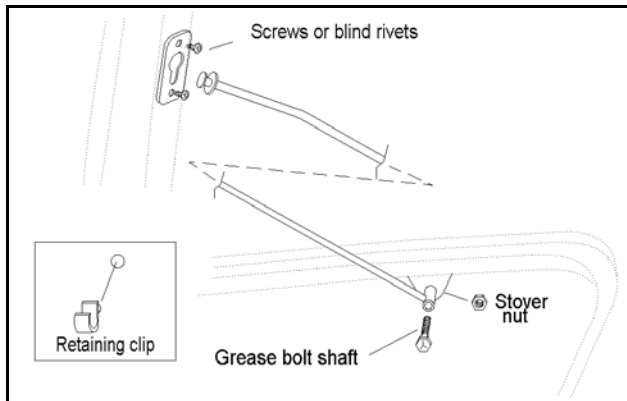

fiat/man/e/Hoodprop

If you removed the **keyhole receptacle** from the hood inner panel when it was painted, install as shown.

The plastic rod retainer fits into a square hole in the wheelhouse panel. It may be removed by squeezing from the backside.


TRUNK LID

Install the trunk lid liner (the fuzzy stuff that was with the optional "street" carpet kit) onto the inside of the trunk lid with contact cement. Trim the material so that it can be pushed just under edge of the fiberglass inner panel.



Glue the half-round **weatherseal** provided with the kit onto the trunk opening flange of the body, leaving about $\frac{1}{8}$ "- $\frac{3}{16}$ " distance between the edge of the seal and the up-curve of the outer lip. To keep from making a mess with the contact cement, you can use masking tape to border where the weatherseal will be placed.

Do not stretch the seal while installing. Start the process at the center of the bottom lip, in front of the latch. Continue over the top and back down to the center. Trim the excess so that the ends meet tightly. See the picture on page 87.

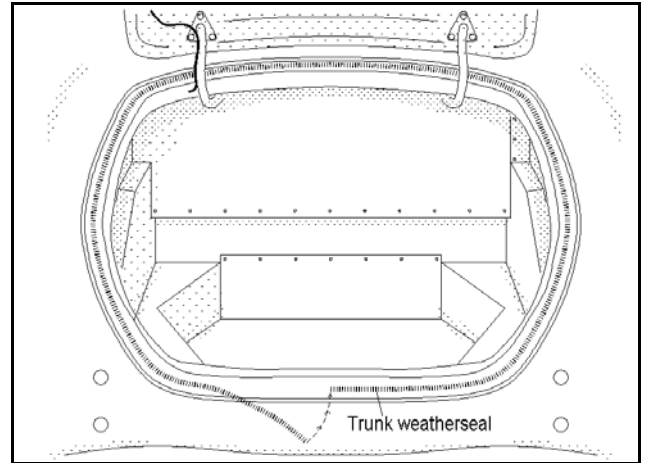

ebod/TRNKSEAL


Bolt the trunk hinges (they are marked with a **T** on the lid side) loosely onto the body with any shims found earlier.

Loosely bolt the trunk lid (with factory shims) onto the hinges. Carefully close the lid, not letting the front edge contact the body. Center the lid in the opening. Slowly lift the lid just enough to get your arm (and a wrench) inside and snug the bolts on the lid part of the hinges. Remember to check the front edge while lifting lid.

The lid can be adjusted further by moving the lid and hinges in unit at the connection on the inner panel. Tighten bolts and recheck fit.

TRUNK STAY

Attach the trunk stay to the trunk lid as shown, using the sheet metal screws at the bottom, stainless steel dome head screws at the top.

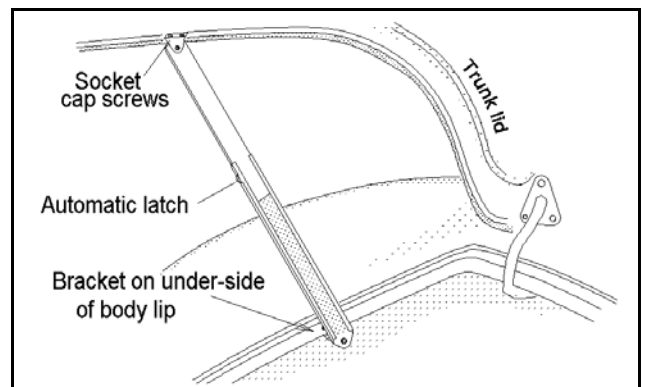


ebod/trnkstay

TRUNK LATCH

Attach the trunk handle and latch to the trunk lid as shown. Don't forget the gasket under the handle.

Attach the latch striker and bracket to the trunk floor.

SECTION G - BODY II

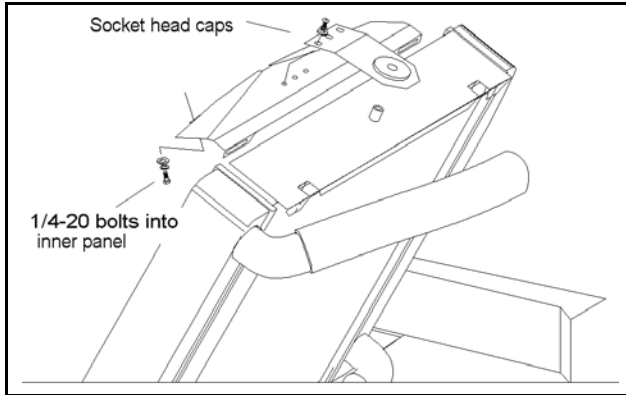


fi'a\man'e\radmt

Fit the rubber grommets and steel sleeves to the upper radiator support. Install the support over the studs on top of the radiator with the large washers, lockwashers and nuts.

Move the radiator forward and attach the support to the body. Attach the support straps (or optional rear fan, see below) between the upper and lower radiator supports.


OPTIONAL FANS

STANDARD

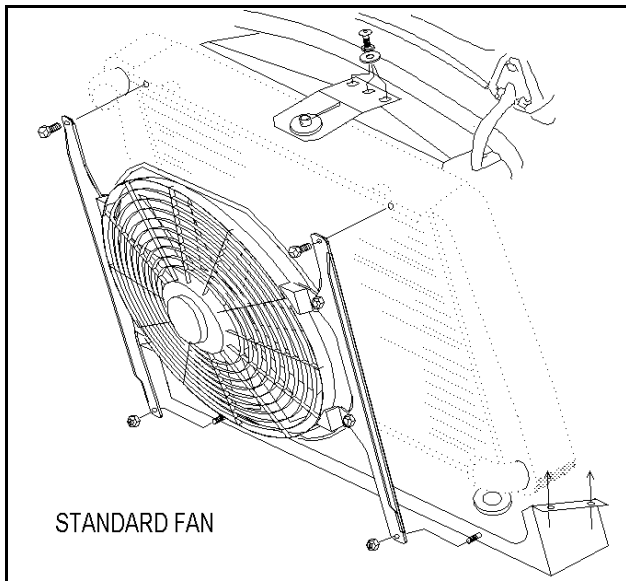

fi'a\man'e\stdfan


15" REAR MOUNTED

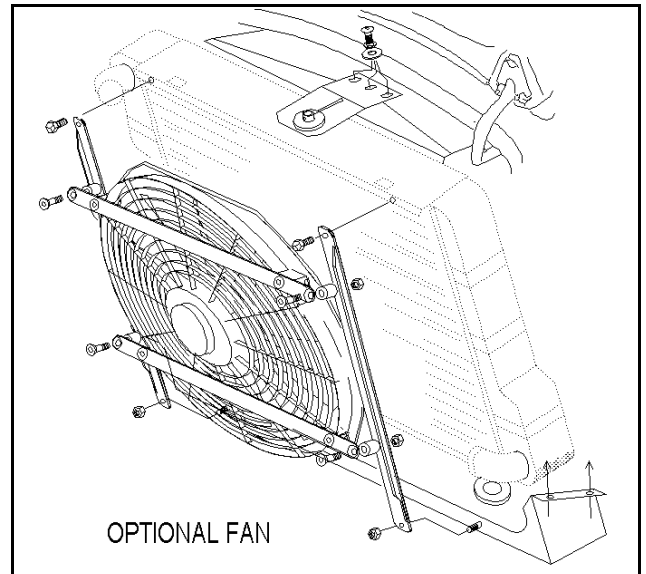

fi'a\man'e\optfan

HOSES

Mounting for the optional expansion tank is shown on page 34. Install the radiator into the chassis as shown above. The hose part numbers and instructions for modifying the front lower hose are covered on page 35. Note that a connecting tube (available from ERA) is required for the upper hose. Assemble the upper hose as shown on page 35.

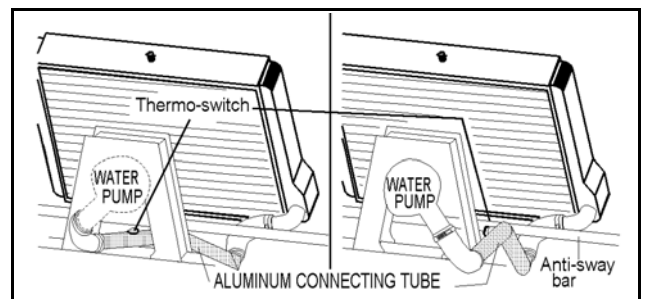

fi'a\man'e\lwathose

The radiator cooling fan thermostatic switch is in the lower hose connector. Connect the harness wires as shown on page 82 and detailed in the wiring instructions. (There is also an over-ride switch on the dashboard).

BATTERY AND CABLES

The battery is mounted in a hidden compartment behind the right rear wheel. Installation of the **support tray** is described on page 75.

BATTERY

INSTALLATION/SERVICE

See the illustration on page 75.

If necessary, remove the right rear wheel.

Remove the screws and nuts holding the splash panel at the rear of the wheel well.

Place the battery onto the tray with the posts toward the outside, away from the chassis. Attach the 135" long battery cable (use a 60" if you are using the cut-off switch. See page 75) to the positive terminal on the battery (toward the rear of the car). The cable is routed around the back of the battery support. The power cable is then routed as per the instructions on page 66.

Attach the ground cable to the front terminal.

Slide the hold-down rods up through the holes at the front and back of the bottom of the battery support, and through the holes in the corner bracket. Secure with lock nuts and washers.

STEERING COLUMN AND WHEEL

Before the Triumph steering column is installed, check that the signal canceling cam on the steering column shaft is oriented correctly. See page 43.


The **steering wheel center cap** (see page 99) is installed after final suspension alignment.

Lower steering column installation is described on page 79.

Prepare the triumph steering column as described on page 42.


*The **steering wheel center cap** (see page 99) is installed after final suspension alignment.*

ASSEMBLY

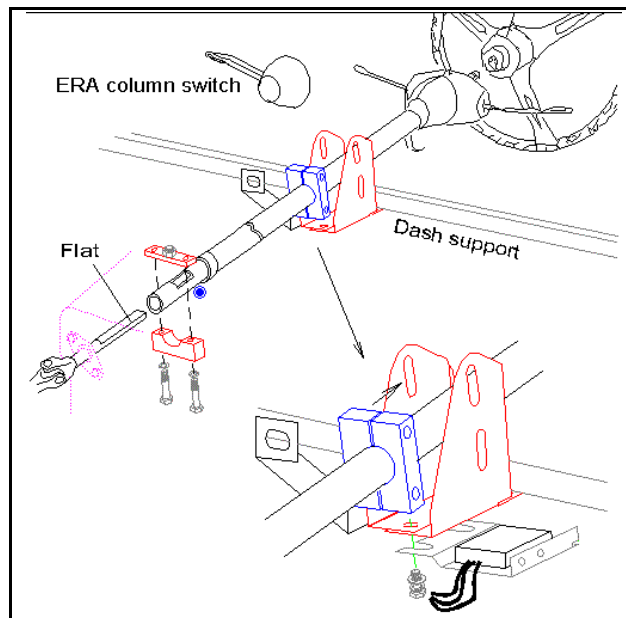

Insert the upper column and housing through the hole in the dashboard, engaging the lower column as the upper one is slid in.

Hold the clamp halves of the upper column around the column, oriented as shown, and slide the clamps together back into the mounting bracket. Insert the cross-bolts as shown below.

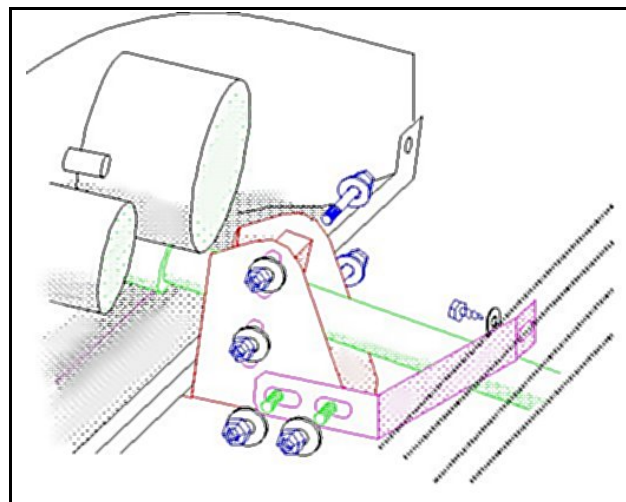

With the driver's seat correctly positioned in relationship to the pedals, slide the steering column and housing in or out to suit your driving position. Adjust the height of the column to your preference, and tighten the cross-bolts.

Align the flat of the lower column with the notch in the upper tube and fit the clamp over the column tube. Snug the bolts slightly but don't tighten.

INSTALL WIPER ARMS

Without the arms installed, cycle the motor through high and low speed. When you turn off the switch, check to see that the drive posts return to the far right (passenger's side) position.



Press the arm onto the post so that the blade falls at the base of the windshield, just above the frame. See above.


Check the sweep of the wiper and adjust if necessary.

Removal:

Use a screwdriver to pry between the post base and the edge of the arm, opposite to the blade.

**CLUTCH HYDRAULICS****HOSE INSTALLATION**

See page 33 for an illustration of the slave cylinder. Ask about oncentric slave cylinder installations

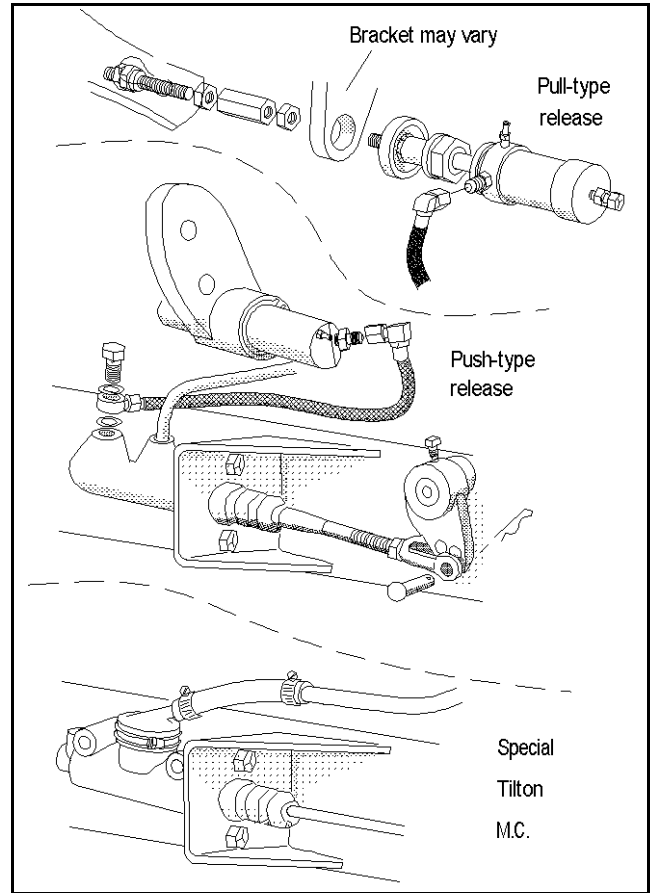

h/chose

Check the tightness of all fittings before bleeding.

BLEEDING

The car must be level for this operation

Fill the brake/clutch reservoir with DOT 3 or DOT 4 fluid. Silicone fluid is not recommended.

Attach a small hose to the slave cylinder bleeder nipple, immersing the other end of the hose in a small cup of fluid. Loosen the nipple about $\frac{2}{3}$ turn with a $\frac{9}{32}$ " or 7 mm wrench.

Work the arm on the clutch pedal shaft (instead of pushing on the clutch pedal itself) until only clear fluid comes out of the hose.